

269A9210

KIT


REVISIONS

SYM

DESCRIPTION

DATE


APP'D

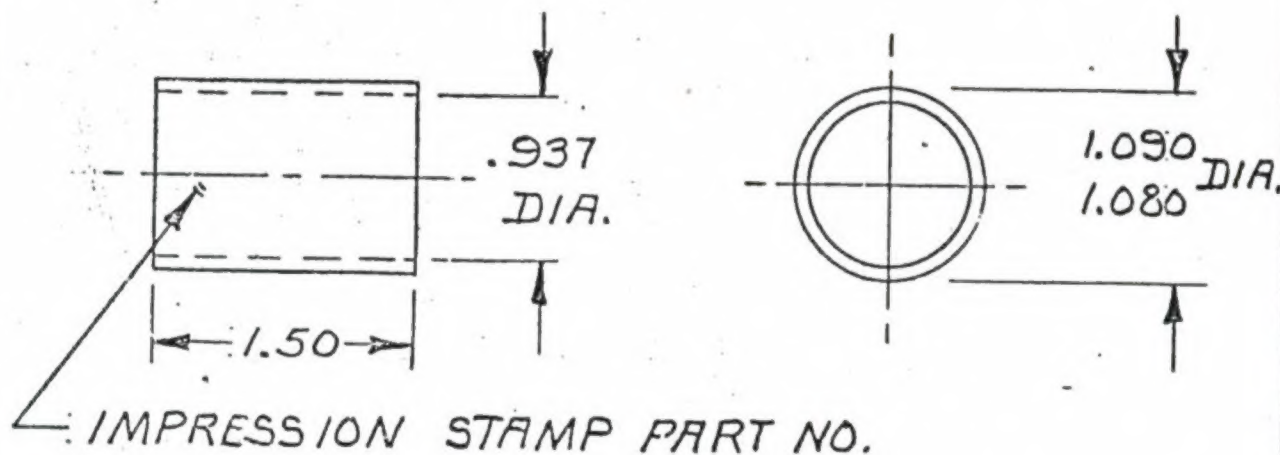

4. USE THIS SLEEVE WITH 269A9206 WRENCH
ON ADJUSTMENT OF 269A1250 DAMPER
3. PARKERIZE PER SPEC. MIL-P-16232, TYPE Z, CLASS 2
2. ALL MACHINED SURFACES R_{25} FINISH.
1. ALT MTL. - 1.12 DIA AISI 1018 STEEL ROD - COMM.
- NOTES: UNLESS OTHERWISE SPECIFIED



1.12 O.D. x .094 WALL x 1.50 SHELBY ROUND SEAMLESS TUBE-COMM.

| REQD | PART NO. | NAME | SIZE | DESCRIPTION | SPECIFICATION |
|---|----------|--------|---------|---------------|--|
| UNLESS OTHERWISE SPECIFIED | DRWN | PAGLOW | 2-11-63 | SLEEVE-MAIN | HUGHES TOOL COMPANY AIRCRAFT DIVISION CULVER CITY, CALIFORNIA  |
| DIMENSIONAL TOLERANCES | CHK'D | AG | 2-6-63 | ROTOR BLADE | |
| 3 PLACE DECIMAL $\pm .010$ | APP'D | Mullen | 2-12-63 | DAMPER WRENCH | |
| 2 PLACE DECIMAL $\pm .03$ | APP'D | | | ADAPTER | |
| ANGULAR $\pm 0^{\circ}30'$ | APP'D | | | SCALE FULL | |
| DIMENSIONS TO BE MET BEFORE PLATING. | APP'D | | | 269A9210 | |
| CORNER RADIUS .062 ON C | APP'D | | | CODE 02731 | SHEET 1 OF 1 |
| BORES AND SPOT FACES OF 1.250 DIA. OR LESS - .093 RADIUS ON GREATER THAN 1.250 DIA. | APP'D | | | | |

FORM 9131 REV 2-61

SHOP COPY